
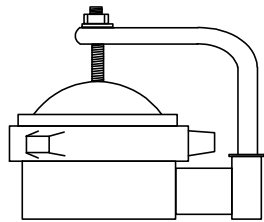
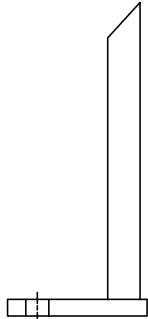


Vessel Data Sheet

Design Parameters Pressure, Max. at Inlet 285 psi Temperature 100 F Corrosion Allow. 0.00" Code Standard ASME Sect. VIII, Div. 1 Stamped? No		Schedule of Openings <table border="1"> <thead> <tr> <th>Service</th> <th>See Dwg.</th> <th>Qty.</th> <th>Size</th> <th>Rating</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>Inlet</td> <td>A</td> <td>1</td> <td>10"</td> <td>150# ANSI</td> <td>Flange</td> </tr> <tr> <td>Outlet</td> <td>B</td> <td>1</td> <td>10"</td> <td>150# ANSI</td> <td>Flange</td> </tr> <tr> <td>Drain</td> <td>C</td> <td>1</td> <td>1"</td> <td>3000#</td> <td>Coupling</td> </tr> <tr> <td>Vent</td> <td>D</td> <td>1</td> <td>1"</td> <td>3000#</td> <td>Coupling</td> </tr> <tr> <td>Press. Tap</td> <td>E</td> <td>1</td> <td>1/4"</td> <td>3000#</td> <td>Coupling</td> </tr> <tr> <td>Press. Tap</td> <td>F</td> <td>1</td> <td>1/4"</td> <td>3000#</td> <td>Coupling</td> </tr> </tbody> </table>					Service	See Dwg.	Qty.	Size	Rating	Type	Inlet	A	1	10"	150# ANSI	Flange	Outlet	B	1	10"	150# ANSI	Flange	Drain	C	1	1"	3000#	Coupling	Vent	D	1	1"	3000#	Coupling	Press. Tap	E	1	1/4"	3000#	Coupling	Press. Tap	F	1	1/4"	3000#	Coupling
Service	See Dwg.	Qty.	Size	Rating	Type																																											
Inlet	A	1	10"	150# ANSI	Flange																																											
Outlet	B	1	10"	150# ANSI	Flange																																											
Drain	C	1	1"	3000#	Coupling																																											
Vent	D	1	1"	3000#	Coupling																																											
Press. Tap	E	1	1/4"	3000#	Coupling																																											
Press. Tap	F	1	1/4"	3000#	Coupling																																											
Operating Parameters Pressure, Max. 285 psi Temperature 100 F Gas Flow Rate 6.1 MMscfh @ 285 psi Gas Specific Gravity 0.65		Materials of Construction <table border="1"> <thead> <tr> <th></th> <th></th> <th>Thickness</th> </tr> </thead> <tbody> <tr> <td>Shell</td> <td>SA53B</td> <td>0.375"</td> </tr> <tr> <td>Bottom Head</td> <td>SA234WPB</td> <td>0.375"</td> </tr> <tr> <td>Closure Head</td> <td>Blind Flg</td> <td></td> </tr> <tr> <td>In/Out Piping</td> <td>SA53B</td> <td>0.500"</td> </tr> <tr> <td>Flanges</td> <td>SA105</td> <td>ANSI 150# RF</td> </tr> <tr> <td>Couplings</td> <td>SA105</td> <td></td> </tr> <tr> <td>Closure Gasket</td> <td>Spiral Wound</td> <td></td> </tr> <tr> <td>Closure Bolts</td> <td>SA194-Gr 5</td> <td></td> </tr> <tr> <td>Legs</td> <td>N/A</td> <td></td> </tr> <tr> <td>Ring Base</td> <td>N/A</td> <td></td> </tr> </tbody> </table>							Thickness	Shell	SA53B	0.375"	Bottom Head	SA234WPB	0.375"	Closure Head	Blind Flg		In/Out Piping	SA53B	0.500"	Flanges	SA105	ANSI 150# RF	Couplings	SA105		Closure Gasket	Spiral Wound		Closure Bolts	SA194-Gr 5		Legs	N/A		Ring Base	N/A										
		Thickness																																														
Shell	SA53B	0.375"																																														
Bottom Head	SA234WPB	0.375"																																														
Closure Head	Blind Flg																																															
In/Out Piping	SA53B	0.500"																																														
Flanges	SA105	ANSI 150# RF																																														
Couplings	SA105																																															
Closure Gasket	Spiral Wound																																															
Closure Bolts	SA194-Gr 5																																															
Legs	N/A																																															
Ring Base	N/A																																															
Vessel Testing Hydrotest Pressure 428 psi Pneumatic Test Pressure N/A Radiograph Optional Magnetic Particle Optional Dye Penetrant Optional		Shipping Information Total Weight 1,150#																																														
Filtration Performance Filter Element P/N (2) 2070K5 Type of Filter Media Polyester Felt Retention Rating 10 micron Efficiency of Retention 99.9% No. of Elements 1 Design Clean Press. Drop 0.5 psid Changeout Press. Drop 10 psid		Optional Threaded Quick Opening Modco Closure 																																														
Closure Specifications Type Blind Flange Gasket Type P/N 20-150 Type of Lifting Assistance Davit Arm, Manual		Optional Angle Support Legs 																																														
Internal Finish Sandblast Light Oil Coat None Glyptol Coat None																																																
External Finish Sandblast SP-10 Commercial Finish Coat Sherwin Williams Industrial Enamel Primer/Finish, Grey																																																

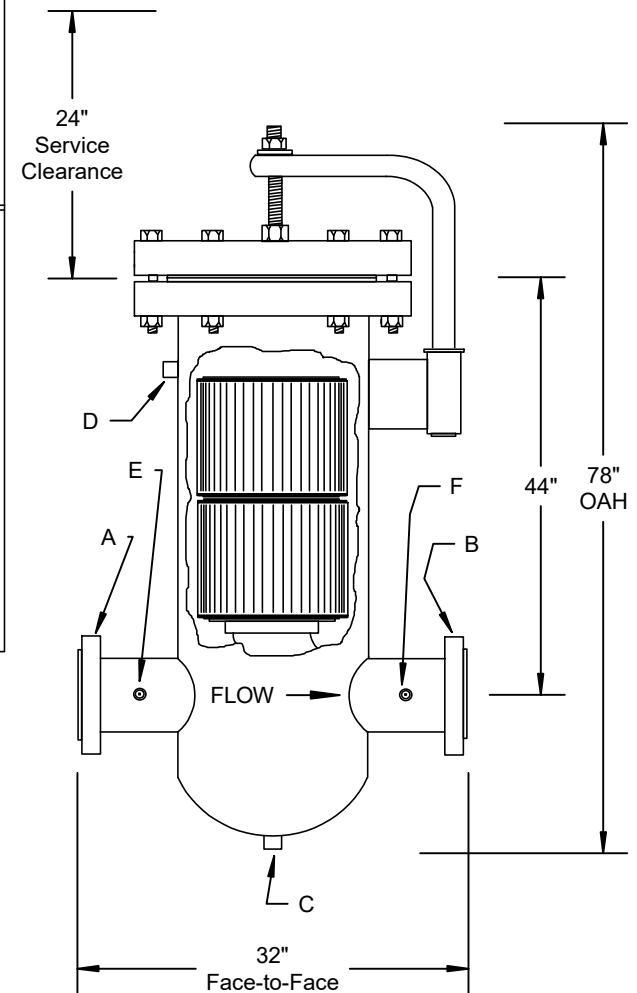

FilterFab
 MANUFACTURING CORPORATION

Model F10-180/285F Data Sheet